



Contact Us

+86 183 5181 7618

www.silfluosilicone.com
inquiry@silflu.com

No. 9 Kechuang Avenue,
Intelligent Manufacturing Industrial Park,
Jiangbei New District, Nanjing 211500
China

Nanjing Silfluo New Materials Co., Ltd.



Nanjing Silfluo New Material Co., Ltd.



SILICONE FLUORINE NEW MATERIAL

We help you find the product that best suits your project

TABLE OF CONTENT

COMPANY INTRODUCTION

PAGE 1~2

SILICONE FLUID

PAGE 17~20

SILICONE RUBBER

PAGE 23~26

SILANE

PAGE 3~16

SILICONE RESIN

PAGE 21~22

About our COMPANY

Nanjing Silfluo New Material Co., Ltd. (Silfluo) is a high-tech enterprise specializing in the research, development, production and sales of new organic silicon and phosphorus materials.



RELIABLE PARTNER

Focus on technological innovation, quality assurance, customer first, cooperation and mutual win

Major in silanes, silicone oils, silicone resins, silicone rubbers, silicone additives, organophosphorus flame retardants and electronic chemicals

Develop organic silicon deep-processing products with high technology and high added value

Why choose OUR BUSINESS

- Diversity: Based on years of experience in the silicone industry, our product categories have expanded from silane coupling agents to silicone oil, silicone resin, silicone rubber, and organophosphorus additive series; in the future, we will continue to develop new products to meet customer needs ;
- Good quality: From raw material procurement, production, inspection, packaging, to delivery, every link is controlled by professional personnel. The entire manufacturing process of our products will be standardized with the requirements of ISO certification combined with our internal quality assurance framework.
- The professional foreign trade sales team provides customers with timely pre-sale, sale and after-sale communication services.

CHOOSING THE RIGHT SILANE

Silanes are bifunctional molecules that act as adhesion promoters, crosslinkers and moisture scavengers in many different applications.

The properties and effects of silanes are defined by their molecular structure:

$Y-(CH_2)_n-Si(OX)_3$, where:

Y = organofunctional group

OX = silicon-functional group

n = 0 or 3

The organofunctional group Y links with the polymer. This group must be chosen carefully to ensure maximum compatibility with the resin. The silicon-functional groups OX, usually alkoxy groups, must be hydrolyzed to the silanol (Si-OH) first before they can bond to the substrate or crosslink.

In general, ethoxy silanes will hydrolyze at a slower rate than their methoxy equivalents.

Choosing the right silane for your application by using the guide below or contacting our experts. The organic functional groups listed below can be used with Thermoplastic resins, Thermosetting resins, or Elastomeric applications:

Polymer	Compatibility guideline: polymers and functional groups of silanes					
	Amino	Epoxy	Sulfur	Mercapto	Methacryloxy	Vinyl
Acrylic	☆	☆		△	△	
Acrylic latex	#	△			☆	☆
Butyl		△	△	△	☆	
Cellulosics	△					#
Epoxy	☆	△		△		
Furan	☆	△				
Melamine	☆	△				
Neoprene				☆		
Nitrile	#	#	☆	☆		
Nitro-cellulose	△					
Phenolic	△	△		△		
Polyamide	☆	△				
Polyester	#	#			☆	△
Polyether	#				☆	
Polyolefin	#	△			☆	☆
Polysulfide	#	#	☆	☆		
Polyurethane	☆	#		☆		
Polyvinyl butyral	#					
PUD	△	#				
Silicone					☆	△
SBR emulsion		#				
Styrene butadiene	#	#	☆	☆		
Urea-formaldehyde	△	△				
Vinyl	△					

☆=Generally Effective △=Alternate #=Only effective with specific silane grades

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE



Product Code	Chemical Name	CAS NO.	EINECS NO.
Aryl/Phenyl Silane			
LS-M11	Phenyltrimethoxysilane	2996-92-1	221-066-9
LS-E11	Phenyltriethoxysilane(Donor A)	780-69-8	212-305-8
LS-M12	Diphenyldimethoxysilane	6843-66-9	229-929-1
LS-E12	Diphenyldiethoxysilane	2553-19-7	219-860-5
LS-M13	Dimethoxymethylphenylsilane	3027-21-2	221-192-4
LS-M14	Methoxytriphenylsilane	1829-41-0	217-382-1
LS-H12	Dihydroxydiphenylsilane	947-42-2	213-427-4
LS-H13	Triphenylsilanol; Hydroxytriphenylsilane	791-31-1	212-339-3
Vinyl Silane			
LS-23	Vinyltri(isopropoxy)silane	18023-33-1	16753-62-1
LS-M21	Vinylmethyldimethoxysilane	16753-62-1	240-816-6
LS-24	Vinyltriisopropenoxysilane	15332-99-7	239-362-1

Description	Equivalent
Phenyl silane used as crosslinking agent for silicone resin and to produce polymer organic silicon compound.	Dynasylan 9165, CP 0330, Dowsil Z-6124, KBM-103, A-153
Phenyl silane used as crosslinking agent in high-temperature silicone elastomers, as an electron donor ("A-donor") .	Dynasylan 9265, CP 0320, Catylen D100, Z-9805, KBE-103, P-triethoxy
Phenyl silane in a polymer reaction	Dow AY43-047, Dynasylan 6010, KBM-202SS
Phenyl silane in a polymer reaction	Dow 1-6533, KBE-202
Phenyl silane in a polymer reaction	
Contains silane groups, which are connected to various groups through PEG, including carboxyl, hydroxyl, amino, maleamide, etc., and silane coupling agents (PEG derivatives) can be coupled with inorganic materials (glass, metal, SiO ₂), etc. joint reaction.	
A very useful intermediate for the synthesis of organosilicon materials, have excellent mechanical and thermal properties as well as various special optical properties. Sol-gel polymers synthesized with diphenylsilanediol have been studied to reduce the birefringence of waveguides.	
Used in the synthesis of pharmaceutical intermediates or other polymers, etc.	
Used for crosslinking vinyl and acrylic emulsions	Z-6550, CoatOsil1706
Used as glass fiber surface treatment, inorganic filler in plastics, sealants, adhesives and adhesives, etc.; For the production of methyl vinyl silicone rubber (VMQ).	Wacker XL12
It can be used as a crosslinker of RTV-1 silicone rubber	

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE

Product Code	Chemical Name	CAS NO.	EINECS NO.
Alkyl/Alkoxy Silane			
LS-E31	Tetraethyl orthosilicate/Ethyl silicate/Tetraethoxysilane(TEOS) electronic grade	78-10-4	201-083-8
LS-M31	Tetramethyl orthosilicate/Methyl silicate/Tetramethoxysilane electronic grade	681-84-5	211-656-4
LS-M32	Dicyclopentyl dimethoxysilane; DCPDMS; (Donor-D)	126990-35-0	
LS-M33	Cyclohexylmethyl dimethoxy silane; CMMS; Donor-C/C-Donor	17865-32-6	
LS-E34	1,2-Bis(triethoxysilyl)ethane	16068-37-4	240-212-2
Isocyanate/Isocyanurate			
LS-M41	3-Isocyanatopropyltrimethoxysilane(TESPI)	15396-00-6	239-415-9
LS-E41	3-Isocyanatopropyltriethoxysilane(IPTS)	24801-88-5	246-467-6
LS-M42	3-Isocyanatopropylmethyl dimethoxysilane	26115-72-0	N/A
LS-E42	3-Isocyanatopropylmethyl diethoxysilane	33491-28-0	N/A
LS-M43	1,3,5-tris[3-(trimethoxysilyl)propyl]isocyanurate(TTMSPI)	26115-70-8	247-465-8
LS-M44	α -Isocyanatomethyltrimethoxysilane	78450-75-6	N/A
LS-E45	1,3,5-Tris(triethoxysilylpropyl)isocyanurate	82194-46-5	N/A
LS-M46	1,3,5-Tris(methyl dimethoxysilylpropyl)isocyanurate	26115-71-9	N/A
LS-M47	1,3,5-Tris(trimethoxysilylmethyl)isocyanurate	82199-95-9	N/A

Description	Equivalent
Electronic-grade alkoxy silane has high requirements on purity. The purity of electronic-grade tetraethoxysilane usually needs to be above 8N, and the impurities need to be less than 1ppb. The production barrier is relatively high. It is mainly used in the CVD (Chemical Vapor Deposition) process in the IC wafer process to deposit a thin film layer on the surface of the semiconductor device.	
It is mainly used in the CVD (Chemical Vapor Deposition) process in the IC wafer process to deposit a thin film layer on the surface of the semiconductor device.	
A new type of olefin polymerization external electron donor. Improve the crystallinity, isotacticity and apparent density of polyolefin products due to its unique and excellent performance in olefin polymerization; Used alone or in combination with other electron donors to adapt to the production of different grades of polypropylene;	Evonik Catylen D400
Additive for propylene polymerization high-efficiency carrier type catalyst; As a good external electron donor in its catalyst system; Used in propylene bulk and solvent polymerization.	
New type of di-silane, bis-silyl functional has six hydrolyzable groups, Organic synthetic intermediate and pharmaceutical intermediate	
New type of coupling agent with reactivity and crosslinking ability. It can be hydrolyzed and react with moisture, alcohols, amines etc.	Silquest A-Link 35, Shin-Etsu KBM-9007, Wacker GF 40
New type of coupling agent with reactivity and crosslinking ability. It can be hydrolyzed and react with moisture, alcohols, amines etc.	Silquest A-Link 25, Silquest A-1310, Shin-Etsu KBE-9007
Isocyanate functional dialkoxy silane	
Isocyanate functional dialkoxy silane	
Acts as adhesion promoter. It has high boiling point, high concentration of trimethoxy silyl groups, isocyanurate chemistry, low basicity and dispersed alkoxy groups.	Silquest A-Link 597, Silquest Y 11570, Silquest Y 11597
α Isocyanate functional dialkoxy silane	
Isocyanurate	
Isocyanurate	
Isocyanurate	

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE

Product Code	Chemical Name	CAS NO.	EINECS NO.
Fluoro Materials			
LS-M531	3,3,3-trifluoropropyl)methyldimethoxysilane	358-67-8	206-619-4
LS-M53	3,3,3-Trifluoropropyltrimethoxysilane	429-60-7	207-059-3
LS-M59	1H,1H,2H,2H-Nonafluorohexyltrimethoxysilane	85877-79-8	N/A
LS-E59	1H,1H,2H,2H-Nonafluorohexyltriethoxysilane	102390-98-7	N/A
LS-M513	1H,1H,2H,2H-Perfluorooctyltrimethoxysilane	85857-16-5	288-657-1
LS-E513	1H,1H,2H,2H-Perfluorooctyltriethoxysilane	51851-37-7	257-473-3
LS-M517	1H,1H,2H,2H-Perfluorodecyltrimethoxysilane	83048-65-1	N/A
LS-E517	1H,1H,2H,2H-Perfluorodecyltriethoxysilane	101947-16-4	435-230-4
LS-51	2,2,2-Trifluoroethyl methacrylate	352-87-4	206-525-3
LS-52	1H,1H,2H,2H-Perfluorodecanethiol	34143-74-3	N/A
LS-M512	Dodecafluoroheptylpropyltrimethoxysilane	1105578-57-1	N/A
LS-53C	Perfluoropolyether modified acrylic compound PFPE modified acrylic compound	N/A	N/A
Oligomer/Mixture			
LS-OM71	Amino/Alkyl methoxide functional oligomeric siloxane	N/A	N/A

Description	Equivalent
Fluoroalkyl functional silane as coupling agent; Making waterproof, anti-oil, anti-fouling treatment agent; As a finishing agent, improve the surface hydrophobicity and antifouling; Applied as the surface of glass hydrophobic antifouling treatment.	
As coupling agent; Making waterproof, anti-oil, anti-fouling treatment agent;	Dow's Z-6333, ShinEtsu's KBM-7103
Fluoroalkyl functional silane	Dow B 3958
Fluoroalkyl functional silane	
High heat resistance, good chemical stability, low surface free energy; As a surface modifier, make the surface hydrophobic, oil-repellent, waterproof, anti-oil, anti-fouling performance;	Dynasylan F8161
High heat resistance, good chemical stability, low surface free energy; As a surface modifier, make the surface hydrophobic, oil-repellent, waterproof, anti-oil, anti-fouling performance; Cosmetic pigment coating agent	Dynasylan F8261
Waterproof, oil-repellent and reflective; Used in waterproof antifouling self-cleaning surface processing; Sol - gel system of additives, the synthesis of fluorine and silicone, the surface of the paint coated in the cosmetics, chemical vapor deposition (CVD), etc.	KBM-7803, TSL8133,
Waterproof, oil-repellent and reflective;	
Used as a monomer for fluorine-containing resin coatings, and for the production of functional polymer materials such as photosensitive resin materials, adhesives, and medical equipment	
Excellent hydrophobic, lipophobic and antifouling;	
Has excellent weatherability, hydrophobic, stripping resistance, solvent resistance and chemical stability	
As anti-dirty graffiti treatment used in a shell for white home appliances such as consumer electronics, household appliances; Optical components such as consumer electronics products, LCD display; Optical lenses, disc surfaces, and other PC \ PMMA \ PET membrane surfaces.	
Diaminofunctional silane used in adhesives and sealants to improve adhesion of amino-reactive resins such as silicones (RTV), two-part urethanes, silylated urethanes, MS polymers, two-part epoxies to inorganic surfaces, plastic surfaces, as well as inorganic fillers.	Dynasylan 1146

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE



Product Code	Chemical Name	CAS NO.	EINECS NO.
--------------	---------------	---------	------------

Amino Silane

LS-M72	N-(3-(Trimethoxysilyl)propyl)butylamine	31024-56-3	250-437-8
LS-M73	γ-Aminopropyl-N-cyclohexylmethyldimethoxysilane	35141-30-1	252-390-9
LS-72	1,2-Bis(trimethoxysilyl)ethane	18406-41-2	242-285-6
LS-M74	Bis(trimethoxysilylpropyl)amine	82985-35-1	280-084-5
LS-E74	Bis(triethoxysilylpropyl)amine	13497-18-2	236-818-1
LS-M71	N-phenyl-3-aminopropyltrimethoxysilane	3068-76-6	221-328-2
LS-M75	3-[[3-(Trimethoxysilyl)propyl]amino]propanenitrile	140938-83-6	N/A
LS-M76	N-(bis 2-cyanoethyl)-3-amide-propyl trimethoxysilane	N/A	N/A
LS-M77	Vinylbenzylaminoethylaminopropyltrimethoxysilane	N/A	N/A

Alpha(α) Silane

LS-M81	[3-(Diethylamino)propyl]trimethoxysilane	41051-80-3	255-192-0
LS-E82	Diethylaminomethyltriethoxysilane	15180-47-9	518-047-9
LS-E83	(N-Phenylamino)methyltriethoxysilane	3473-76-5	N.A.
LS-E84	Dichloromethyltriethoxysilane	19369-03-0	N.A.
LS-E85	Methacryloxymethyltriethoxysilane	5577-72-0	N.A.
LS-E86	N-(3-(Triethoxysilyl)methyl)butylamine	N.A.	N.A.
LS-E87	N-[(Triethoxysilyl)methyl]cyclohexylamine	26495-91-0	247-744-4
LS-E88	2-aminoethylamine methyl triethoxysilane	N.A.	N.A.

Description

Unique secondary amino structure, which accelerates silane - capped hybrid polymer (SPUR) production and capture of toxic NCO- groups

Triamino-functional propyltrimethoxysilane, adhesion promoter and surface modifier, improved adhesion, moisture and corrosion resistance

Acts as an adhesion promoter and crosslinking agent; Used in sol-gel systems;

Excellent crosslinking properties, acts as an adhesion promoter and surface modifier in silane-terminated polyurethanes

Excellent crosslinking properties, acts as an adhesion promoter and surface modifier in silane-terminated polyurethanes

As adhesion promoter, combines phenyl and amino functionality in the same molecule

Better storage stability, not easy to turn yellow

Better storage stability, not easy to turn yellow

40% in methanol, coupling agent to improve adhesion of organic resins to inorganic surfaces. e.g. epoxy based print circuit board.

Equivalent

Dynasylan 1189, KBM-573, SZ-6083

Dynasylan TRIAMO, Silquest A-1130, Y5621

Dynasylan BTSE, Silquest Y-9805

Dynasylan 1124, Silquest A-1170, KBM-666P

Dynasylan 1122

Silquest Y-9669, Z-6083, KBM-573

Z-6032, Z-6132, Z-6269

As a catalyst for neutral curing part 1 of RTV's

A novel alfa silane used as curing agent in silicone rubber ND22

A novel alfa silane used as curing agent in silicone rubber; Used in glass fiber enhanced plastic and mineral filling plastic. ND42

Used as surface treatment and silicone rubber curing agent ND43

Adhesion promoter in silicone rubber


Adhesion promoter in silicone rubber

Adhesion promoter in silicone rubber

Adhesion promoter in silicone rubber

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE

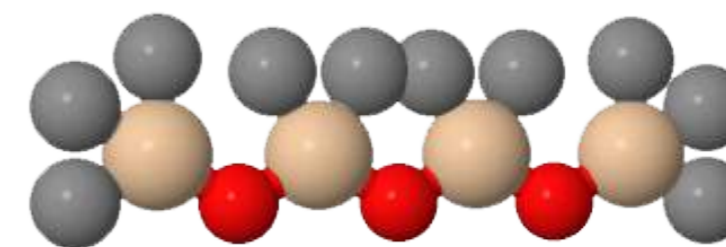

Product Code	Chemical Name	CAS NO.	EINECS NO.
Siloxane/Silazane			
LS-610 /HMDO	Hexamethyldisiloxane(MM, HMDO)	107-46-0	203-492-7
LS-611 /HMDS	Hexamethyldisilazane(HMDS) HMDS electronic grade	999-97-3	213-668-5
LS-624 /V4	Tetravinyltetramethylcyclotetrasiloxane(V4)	2554-06-5	219-863-1
LS-623	1,3-Divinyl-1,1,3,3-tetramethyldisilazane	7691-02-3	231-701-1
LS-622	Divinyltetramethyldisiloxane(Vinyl double head)	2627-95-4	220-099-6
LS-612	1,1,3,3-Tetramethyldisiloxane (Hydrogen-containing double head)	3277-26-7	221-906-4
LS-613	1,1,3,3-tetramethyl-1,3-bis[3-(oxiranylmethoxy)propyl]- -Disiloxane (Glycidoxy Dual-end Siloxane, ternary polymer production material)	126-80-7	204-803-9
LS-673	Heptamethyltrisiloxane	1873-88-7	217-496-1
LS-614	Hexaphenyldisiloxane	1829-40-9	217-381-6
LS-651	1,3,5-Tris[(3,3,3- trifluoropropyl)methyl]cyclotrisiloxane/D3F	2374-14-3	219-154-7
LS-615	1,1,5,5-Tetramethyl-3,3-diphenyl-trisiloxane	17875-55-7	241-828-4

Description	Equivalent
Capping agent, water repellent and inorganic filler treatment agent	
Used as a tackifier and photoresist in the chip photolithography process, photoresist, used as a stabilizer for lithium battery electrolyte, can improve the electrochemical performance and cycle performance of lithium-ion batteries, and medical use.	Dynasylan HMDS
To be used in the production process of high vinyl silicone fluid, addition molding silicone rubber, liquid silicone, high vinyl silicone rubber, vinyl hydroxy silicone fluid, etc.; As basic raw materials for the synthesis of various silicone rubbers.	DOWSIL™ 1-2287 Intermediate, Dow MV- CYC-4
Used in the manufacture of silicone resin rubber, silicone resin colloid and vinyl silicone resin; Adhesion promoter for negative photoresist.	
Used in addition molding silicone rubber, silicone gel, liquid silicone, vinyl silicone resin, vinyl silicone fluid, platinum chromium compound, etc.	Degussa CD 6210
Used in the production of addition molding silicone rubber, silicone gel, methyl hydrogen silicone oil and other special additives	
Raw materials for ternary copolymerization	
Containing highly active silicon-hydrogen bond, it is the basic raw material for synthesis of polyether modified trisiloxane. Polyether modified trisiloxane is a kind of surface active agent with special structure, which can be used in pesticide additives and coating additives;	
Used in the synthesis	
Used for processing and manufacturing fluorosilicone, liquid fluorosilicone, hydroxyl fluorosilicone oil, fluorosilicone grease, fluorosilicone liquid, defoamer, etc.	
Widely used as crosslinking agent of liquid silicone rubber, phenyl silicone rubber or phenyl resin, especially for LED encapsulation; Manufacturing dedicated medical products.	

PRODUCTS

SPECIALTY SILANE / SILOXANE / SILAZANE

Long term relationships that deliver mutual benefit.
 New potential products are the future of one corporation, if there is any new interesting products, we welcome you to contact us and we will check the possibilities with our lab.
 We deeply know that global procurement is necessary. Many of our regular customers often ask our help to inquire about some products and make a combined shipment with our products.
 So in similar industries, We also offering some sourcing services for our regular customers by using our knowledges of chemicals as well as our background in China.



Product Code	Chemical Name	CAS NO.	EINECS NO.
Other Specialties			
LS-C11	N,O-Bis(trimethylsilyl)acetamide(BSA)	10416-59-8	233-892-7
LS-C12	Allytrimethoxysilane	2551-83-9	219-855-8
LS-C13	3,5-dimethyl-N-(3-(dimethoxymethylsilyl)propyl)-1H-pyrazole-1-carboxamide	N/A	N/A
LS-C14	1,1,3,3-Tetramethyl-2-[3-(trimethoxysilyl)propyl]guanidine	69709-01-9	274-092-8
LS-PEG10	3-(Methoxypolyoxyethylene)trimethoxysilane	N/A	N/A
LS-PEG20	3-[Methoxy(polyethyleneoxy)-propyl]trimethoxysilane; MPEG-propyltrimethoxysilane	65994-07-2	N/A

Description	Equivalent
Neutral silane protective agent, widely used in organic synthesis, mainly drug synthesis	Dynasylan BSA
Used in LED, OLED, display materials, optical materials, light curing materials, digital materials and other industries or fields Improve the adhesion and bonding properties	
As a crosslinking agent and accelerator; Used with VIPs for room temperature vulcanization silicone rubber. Used in resin, ink, coating, rubber	
MPEG-silane is a linear monofunctional methyl ether PEG with a reactive tri-ethoxy silane group; Silane PEG is often used to PEGylate glass and hydroxylated surfaces and particles.	Dynasylan 4140; Dynasylan 4144; Dynasylan 4150

PRODUCTS

SILICONE FLUID




Product Code	Chemical Name	Tech Data & Application
LF-201	Dimethyl silicone oil	Viscosity (25°C/cst) 50,100,350,500,1000,12500,60000. Insulation oil, lubricating oil, shock-proof oil, foaming agent, release agent, mineral oil additive.
LF-221	High-viscosity dimethyl silicone oil	Viscosity (25°C/cst) 100000, 300000, 500000. Used for lubrication, damping, can be used for the application of shock absorption, or for the effect of molding; Based on the incompatibility of organic silicon and the system, it is applied to products and other products.
LF-211	Low-viscosity dimethyl silicone oil	Viscosity (25°C/cst) 5,10,20. Industrial application: such as glass bottle and lens coatings, home product components, mechanical fluids, oily permeability, surface activated components, coatings, electrical insulation flow, and brighter components.
LF-AM11	Long chain alkyl-modified silicone oil	Viscosity (25°C/cst) 350~550. Lubricant, lubricating fat foundation oil; anti-foaming agent; personal care supplies additives; release agent.

Product Code	Chemical Name	Tech Data & Application
LF-VT11	Vinyl silicone oil (Vinyl terminated polydimethylsiloxane)	Viscosity (25°C/cst) 20,50,100,200,245,300,350,500,1000,2000,5000,10000,20000,60000,100000. Used as a basic material for adding liquid silicone rubber; It is used to add the main raw materials of electronic glue, thermal conductivity, LED lamp glue, etc.; Used for the main raw material of ionizing agent (lyric silicon oil); This product reaches a variety of organic materials such as polyurethane and acrylic acid, which can make new materials with excellent performance (weather resistance, aging, anti-ultraviolet rays, enhanced toughness, etc.). use.
LF-VT51	Vinyl silicone oil (Vinyl terminated polydimethylsiloxane)	Viscosity (25°C/cst) 70,100,500,1000,10000. This product adopts a special synthesis process. The product does not contain metal ions such as potassium and sodium, and has low volatile matter and extremely low residual mixed ring volume (D3~D10), thus ensuring excellent electrical properties. It is especially suitable for the coating and packaging of high-end products such as silicon wafers, semiconductors, optical fibers, and avionics.
LF-MT11	Trimethoxy-terminated polydimethylsiloxane Alkoxy silicone oil (capped 107)	Viscosity (25°C/cst) 400~600,1000~1500,2700~3300, 6000~9000,16000~24000,30000~42000,70000~90000. It is suitable for the coating and packaging of high-end products such as silicon wafers, semiconductors, optical fibers, and avionics.

PRODUCTS

SILICONE FLUID

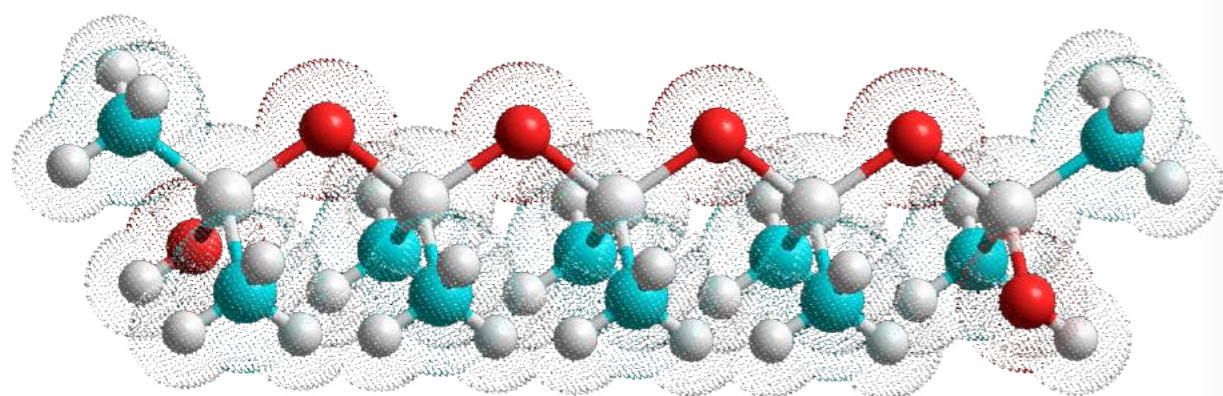

Product Code	Chemical Name	Tech Data & Application
LF-PM11	Phenylmethyl silicone oil	Viscosity (25°C/cst) 100,500,1000,50000. Base oil for low-temperature silicone grease; lubricant for plastic bearings working in low-temperature environments; working fluid for hydraulic transmission; damping fluid for instruments and devices; heat transfer fluid for oil bath systems.
LF-PV11	Phenylvinyl silicone oil	Viscosity (25°C/cst) 200~10000 High refractive index, low volatile content; High and low temperature resistance; Weather resistance; Excellent optical performance; One of the main raw materials in the field of LED packaging.
LF-PV12	Phenylvinyl silicone oil	Viscosity (25°C/cst) 500,1000,5000,10000. This product is vinyl-terminated phenyl silicone oil, which is the base polymer of phenyl addition type silicone rubber.
LF-PH11	Phenyl hydrogen silicone oil	Viscosity (25°C/cst) 40~120. Crosslinking agent for addition-type phenyl silicone rubber; high refractive index, low volatile content; one of the main raw materials in the field of LED packaging.

Product Code	Chemical Name	Tech Data & Application
LF-MF11	Methyl fluoro silicone oil	Viscosity (25°C/cst) 200,500,1000,5000,10000,20000. With low surface tension, it can be used as a defoamer in the oil and gas and coating industries; With excellent oil and solvent resistance, it can be used as a raw material for anti-corrosion greases and silicone greases.
LF-VF11	Vinyl fluoro silicone oil	Viscosity (25°C/cst) 200,500,1000,5000,10000,20000. With excellent oil resistance and solvent resistance, it can be used as a raw material for fluorosilicone rubber.
LF-VTF11	Vinyl terminated fluorine silicone oil	Viscosity (25°C/cst) 300~100000, customized. Suitable for the raw materials such as fuel - resistant, heat - resistant, and good electrical insulation, and quality materials such as fuel tank seals, fuel oil pipes and other product raw materials; Suitable for active diluents for bonus fluoride silicon rubber.
LF-HF11	Hydroxy fluorine silicone oil	Viscosity (25°C/cst) 50~50000, customized. It is suitable for the structural control agent of fluorine silicon rubber; It is suitable for the base glue and diluted material of the sulfurizing silicon rubber in the contraction.
LF-HF12	Hydrofluoro silicone oil	Viscosity (25°C/cst) 30~50; 50~100, customized. Used as a bonus -silicon rubber, linked agent, chain expansion, fluorine silicon rubber coatings, and other applications.

PRODUCTS

SILICONE RESIN

Product Code	Chemical Name	Technical data
MQ Silicone Resin		
LR-MQ	Methyl MQ Silicone Resin	Appearance: white powder or clear liquid Viscosity(50% Toluene solution, mm ² /s): 4.0 hydrochloric acid content(50% Toluene solution, mm ² /s): ≤10 Powder packing density(g/cm ³): 0.25 Molecular Weight: 5000±1000 Average granularity(μm): 100 Hydroxyl content(%): ≤0.5 M/Q value: 0.60~0.80
LR-MQV	Methyl Vinyl MQ Silicone Resin	Appearance: Transparent liquid M/Q value: 0.60~0.90 Density(25°C): 0.89-0.95 Vinyl content(%): 0.6~4.0
LR-MQVG	Water glass method vinyl silicone resin	Appearance: White powder or Colorless to light yellow clear liquid M/Q value: 0.60~0.90 Vinyl content(%): 0.25~4.0
LR-MQP	Vinyl phenyl Silicone M/Q Resin	Appearance: Colorless to light yellow clear liquid Viscosity(25°C, mPa.s): 7000-60000 Vinyl content(%): 5.1~6.0 Refractive index: 1.520-1.560 Volatile content(150°C/3h, %): ≤1
LR-MQPH	Phenyl Hydrogen Silicone Resin	Appearance: Colorless to light yellow clear liquid Viscosity(25°C, mPa.s): 40-6800 Hydrogen content(%): 0.22~0.52 Refractive index: 1.4900-1.5500 Volatile content(150°C/3h, %): ≤1



Product Code	Chemical Name	Technical data
Silicone Resin Intermediate		
LR-P10	Phenylsilicone resin intermediate	Appearance: Colorless clear liquid Viscosity(25°C, mPa.s): 8-180 Specific gravity: 1.05-1.20 Methoxy content(%): 15-18
LR-HP10	Hydroxyphenyl silicone resin intermediate	Appearance: solid flake Functional groups: silanol Silicon dioxide content: 50-52% Phenyl/propyl proportion: 2.7/1 Average molecular-weight: 2600-3200 Solid resin content (1,5g,3h at 135°C) : 99%min Softening Point: 40-50°C
Other Resins		
LR-610	Polymethylsilsesquioxane Spherical Silicone Resin	Appearance: White spherical powder Average particle size: 2~6um Particle size distribution: 1-15um Active ingredient: ≥99% Suggested dosage PS resin: 0.5-1.0% PC resin: 0.25-0.75% Coating glue: 0.2-1.0% Makeup: 0.5-5%
LR-10	silicone resin for thermally conductive gels	We have, please contact.
LR-11	Resins for Optics	We have, please contact.

Note: It could be customized upon requirement.

Please conduct a trial test before using this product to confirm whether it is suitable for the purpose of use. In addition, the use described does not guarantee that it will not conflict with any patent.

PRODUCTS

SILICONE RUBBER

Product Code	Chemical Name	Tech Data & Application
LR-HTV	Phenyl vinyl methyl silicone; Poly dimethyl diphenyl vinyl siloxane; Phenyl silicone gum; PVMQ	Phenyl content (mol %): 5.0-25.0 Vinyl content (mol %): 0.10-0.35 In addition to a series of characteristics of vinyl silicone rubber, this product also has excellent low temperature resistance, radiation resistance, burning resistance and self-extinguishing properties. It is one of the important materials in the aerospace industry and cutting-edge technology. It can be used as a variety of molded and extruded products, used for sealing rings, gaskets, pipes, and rods that are resistant to cold and burning, heat aging and radiation. It can also be used to make various special-purpose products, such as: making damping materials, pressure-sensitive adhesives, etc.
LR-RTV	Phenyl silicone gum (RTV); Dihydroxy poly dimethyl diphenyl siloxane	Viscosity(25°C, mPa.s): 2000-10000 Phenyl content (mol%): 2.5-20.0 In addition to excellent electrical properties, weather resistance, and ozone resistance, this product also has good low temperature resistance, radiation resistance, ablation resistance and self-extinguishing properties. It can be used as potting material for various electronic and electrical components, and can also be used as impregnation impression and release material, and a component of adhesive. It is still elastic at minus 120°C and can be used for special purposes.
LR-107	Room temperature vulcanized silicone rubber (RTV-107)	Viscosity (25°C/cst): 20000, 50000, 80000. Customized107 Silicon -sulfurizing silicon rubber is a special rubber that can vulcanize at room temperature. The silicon rubber formed by the temperature of this product has excellent insulation, resistant to arc, electric halo, water resistance, and aging climate. It can be used in the range of minus 60- to 250 ° C and has waterproof, dustproof, cold prevention and other effectiveness.



Product Code	Chemical Name	Tech Data & Application
LR-110	Methyl vinyl silicone rubber (110 silicone rubber)	M.W. 45-90(×10000) This product is insoluble in water, soluble in toluene, etc. Its products have the excellent characteristics of compressed deformation, saturated water steam. In the industrial departments such as aviation, electronics, machinery, chemical industry, it can be used to create sealed materials with high and low temperatures and waterproof and moisture -proof insulation materials. Because of its physiological inertia, it can be used to produce artificial organs and medical pipes in terms of medical and hygiene. It is the raw material of silicon rubber.
LR-120	Methylphenylsilicone rubber gum (120 silicone rubber)	M.W. 50~80 (×10000); M.W. 40~70 (×10000) Excellent low temperature resistance, high temperature resistance, excellent weather resistance; It can be used as a raw material for low temperature, high temperature resistance, radiation -resistant phenyl phenyl mixed glue.

PRODUCTS

SILICONE RUBBER

Product Code	Chemical Name	Tech Data & Application
LR-F5100	Fluoro silicone gum	Thermal vulcanized fluorine silicon polymers have excellent oil resistance and anti-solvents performance in transparent glue. They can be used at -60 ~ 200 °C. It is mainly used to prepare fluorosilicon mixed glue.
LR-F5200	F5200 High Tear Strength Series Fluorosilicone Rubber	It has excellent oil, solvent, high and low temperature resistance; high strength and high tear strength. It is a uniform mixture made on the basis of Fluoro-silicone elastomer by adding some kinds of fillers, additives etc.
LR-F5300	F5300 Low Pressure Deformation Fluorosilicone Compound	This product is a uniform mixture made on the basis of Fluoro-silicone elastomer by adding some kinds of fillers, additives etc. It has the advantages of silicone rubber and fluororubber. It has excellent oil resistance, solvent resistance, low compression deformation, good high and low temperature resistance, weather resistance, and resilience. It is an elastomer which can be used in fuel media of -60 to 225°C.
LR-F5400	F5400 High Resilience Series Fluorosilicone Rubber	It has excellent oil, solvent resistance, low compression set, good high or low temperature resistance and resilience. This product is a uniform mixture made on the basis of Fluoro-silicone elastomer by adding some kinds of fillers, additives etc.
LR-F5500	F5500 Adhesive Purpose Series Fluorosilicone Rubber	Excellent calenderability, oil resistance, solvent resistance which can bond with silicone rubber.
LR-F5502	F5502 Adhesive Purpose Series Fluorosilicone Rubber	It has excellent oil, solvent resistance, low compression set, good high or low temperature resistance and resilience.
LR-F5600	F5600 Flame-retarded Series Fluorosilicone Rubber	It has excellent oil, solvent, good high and low temperature resistance; good flame retardance which meets the UL94V0 highest flame-retardant level.
LR-F5700	F5700 Extruded Fluorosilicone Rubber	It has excellent oil, solvent resistance, acid and alkali resistance. This product is suitable for DCPH-vulcanized extrusion molding.

